

Test Equipment Solutions Datasheet

Test Equipment Solutions Ltd specialise in the second user sale, rental and distribution of quality test & measurement (T&M) equipment. We stock all major equipment types such as spectrum analyzers, signal generators, oscilloscopes, power meters, logic analysers etc from all the major suppliers such as Agilent, Tektronix, Anritsu and Rohde & Schwarz.

We are focused at the professional end of the marketplace, primarily working with customers for whom high performance, quality and service are key, whilst realising the cost savings that second user equipment offers. As such, we fully test & refurbish equipment in our in-house, traceable Lab. Items are supplied with manuals, accessories and typically a full no-quibble 2 year warranty. Our staff have extensive backgrounds in T&M, totalling over 150 years of combined experience, which enables us to deliver industry-leading service and support. We endeavour to be customer focused in every way right down to the detail, such as offering free delivery on sales, covering the cost of warranty returns BOTH ways (plus supplying a loan unit, if available) and supplying a free business tool with every order.

As well as the headline benefit of cost saving, second user offers shorter lead times, higher reliability and multivendor solutions. Rental, of course, is ideal for shorter term needs and offers fast delivery, flexibility, try-before-you-buy, zero capital expenditure, lower risk and off balance sheet accounting. Both second user and rental improve the key business measure of Return On Capital Employed.

We are based near Heathrow Airport in the UK from where we supply test equipment worldwide. Our facility incorporates Sales, Support, Admin, Logistics and our own in-house Lab.

All products supplied by Test Equipment Solutions include:

- No-quibble parts & labour warranty (we provide transport for UK mainland addresses).
- Free loan equipment during warranty repair, if available.
- Full electrical, mechanical and safety refurbishment in our in-house Lab.
- Certificate of Conformance (calibration available on request).
- Manuals and accessories required for normal operation.
- Free insured delivery to your UK mainland address (sales).
- Support from our team of seasoned Test & Measurement engineers.
- ISO9001 quality assurance.

Test equipment Solutions Ltd
Unit 8 Elder Way
Waterside Drive
Langley
Berkshire
SL3 6EP

T: +44 (0)1753 596000
F: +44 (0)1753 596001

Email: info@TestEquipmentHQ.com
Web: www.TestEquipmentHQ.com



Agilent 1156/7/8A Active Probes for Infiniium Oscilloscopes

Product Overview



Agilent 1156/7/8A active probe with accessories

Features


- 4 GHz, 2.5 GHz, and 1.5 GHz bandwidth models
- Small size makes probing easier
- 88 ps rise time (on 4 GHz model)
- 100 k Ω , 0.8 pF, non-resonant input impedance
- ± 15 V offset
- 5 V peak-to-peak dynamic range
- Accessories designed for minimal loading on your device and optimum response
- Compatible with the Infiniium AutoProbe Interface

As the speeds in your design increase, you may notice more overshoot, ringing, and other perturbations when connecting an oscilloscope probe. Probes form a resonant circuit where they connect to the device. If this resonance is within the bandwidth of the oscilloscope probe you are using, it will be difficult to determine if the measured perturbations are due to your circuit or the probe.

Agilent is the only company that has overcome the resonance formed by the connection of a probe to a device. The Agilent 1156/7/8A probes optimize performance to make your job easier:

- High input impedance of 100 k Ω and 0.8 pF that never resonates low
- Flat frequency response across the entire bandwidth of the probe
- A full 5 V peak-to-peak dynamic range, and
- ± 15 V of offset.

Combined with the Agilent 54846A Infiniium scope, the 1158A 4 GHz probe offers you a full 2.25 GHz of system bandwidth, giving you accurate insight into your high-speed devices.

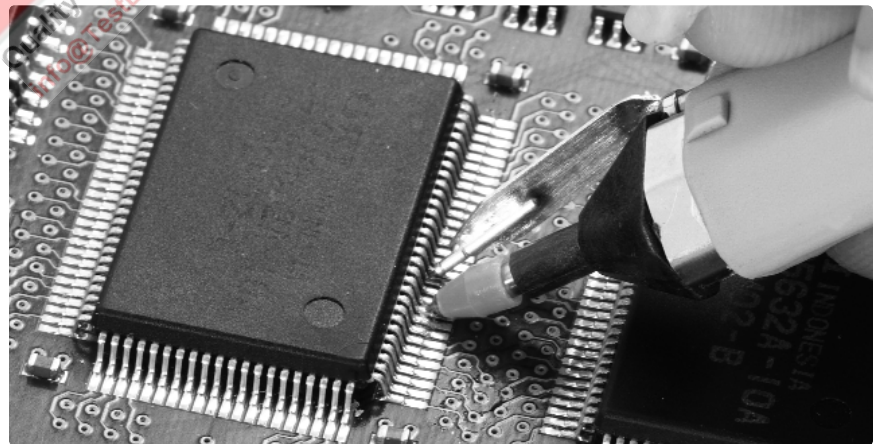

Agilent 1156/7/8A active probe with resistive signal pin and ground blade



Agilent Technologies

Small Size

Have you experienced problems with large, clunky probes? If so, you probably found your probe awkward to hold and had difficulty connecting to your signals. With the 1156/7/8A's small size you can handle the probe expertly and gain access to tight spaces. Plus, the low mass makes the probe more durable. Agilent makes your job easier – giving you performance that is easy to use.

Faithful Reproduction of Your Signal

Now you can accurately measure your high-speed signals without introducing errors from a probe that has a resonant input impedance or non-flat frequency response. Resistance is placed as close as possible to the point being probed, which keeps the input impedance from resonating low, and it also allows a flat frequency response across the entire bandwidth of the probe. Finally, there is a high bandwidth active probe where the waveform on screen matches the waveform at the probe tip. No other probe currently on the market offers a flat response for the entire bandwidth of a 4 GHz probe!

With the wide dynamic range and ± 15 V of offset, the probe can be used in a wide variety of applications.

Superior Accessories


Your device under test (DUT) determines the type of probing accessories you need. Of course, there are electrical trade-offs depending on the type of connection you use. Longer connections from your DUT produce lower performance probing systems.

Agilent offers a variety of accessories optimized to give you the most accurate reproduction of your signal. In addition, the performance of each accessory is characterized for you. Now you can make informed decisions and get the best measurement for your environment. Superior performance combined with the knowledge to use it - that's how Agilent helps you do your job better.

This suite of accessories is properly damped to give you a flat transmitted response and non-resonant input impedance. Use these supplied accessories to get the best performance from your probe:


- | | |
|---|-------------|
| • Resistive signal pin (orange) | E2640A |
| • Solderable-tip 5 cm resistive signal lead | E2638A |
| • Socket-end 5 cm resistive signal lead | 01156-82105 |
| • Socket-end 10 cm resistive signal lead | 01156-82108 |
| • Ground blade assembly | E2641A |
| • Solderable SMT ground pin | 1253-5054 |
| • Solderable through-hole ground pin | 1252-7150 |

Vin and Vout when driven from a 25 Ω source

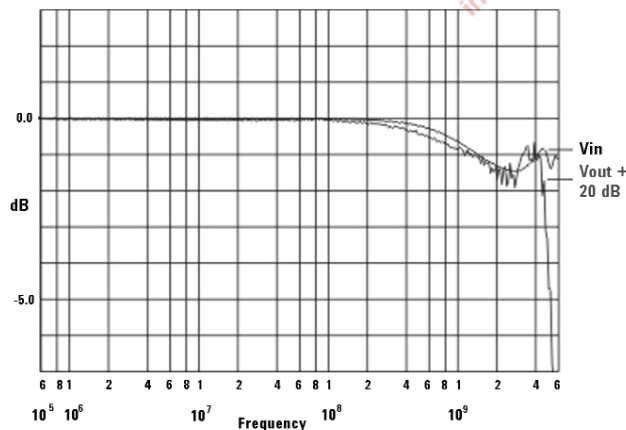

Notice how closely the output matches the input

Response = V_{out}/V_{in}

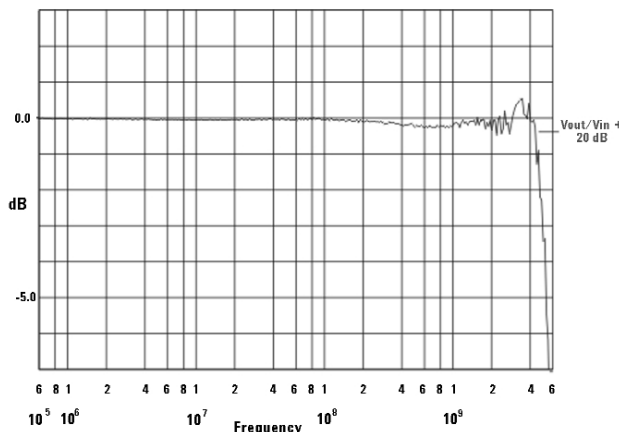

The flat response means the waveform on the scope screen will match the waveform at the probe tip - across the entire 4 GHz bandwidth.

Specifications and Characteristics

Bandwidth ¹	(-3dB)
1156A	>1.5 GHz
1157A	>2.5 GHz
1158A	>4 GHz
System Bandwidth	
1 GHz	1156A with 54835A
1.5 GHz	1157A with 54845A
2.25 GHz	1158A with 54846A
Rise and Fall time (10% to 90%)	
1156A	<233 ps
1157A	<140 ps
1158A	<88 ps
calculated from $tr = 0.35/\text{bandwidth}$	
Input Capacitance	0.8 pF
Input Resistance ¹	100 kΩ 1%
Flatness, Swept Response	
0.2 dB, 100 kHz to 100 MHz	
0.4 dB, 100 MHz to 2.5 GHz	
2.0 dB, 2.5 GHz to 4.0 GHz	
Flatness, Step Response	
15% overshoot, 35 ps input edge	
10% overshoot, 75 ps input edge	
2%, 1 ns after edge	
Dynamic Range ²	
>5.0 V peak-to-peak	
dc Attenuation ¹	
10:1 ±3% before calibration ⁴	
10:1 ±1% after calibration ⁴	
Zero offset error referred to input ¹	
<30 mV before calibration	
<5 mV after calibration	
Offset Range ¹	±15.0 V
Offset Accuracy ¹	
<3% of setting before calibration ⁴	
1% of setting after calibration ⁴	
Noise referred to input	
3.0 mVrms	
Propagation Delay	
5.5 ns	
Maximum Input Voltage	
40 V peak, CAT I ³	
ESD Tolerance	
>5 kV from 100pF,	
300Ω HBM	
Temperature Drift	
Offset: <1.0 mV/°C	
Attenuation (Gain):	
0.1 %/°C	

Environmental Conditions

Temperature	
Operating	0 °C to +55 °C
Non-operating	-40 °C to +70 °C
Humidity	
Operating	Up to 95% relative humidity (non-condensing) at +40 °C
Non-operating	Up to 90% relative humidity at +65 °C
Power Requirements from AutoProbe Interface	
+12 Vdc @ 3 mA typical	
+ 5 Vdc @ 35 mA typical	
-5 Vdc @ 37 mA typical	
Weight	Approximately 0.69 kg

Probe Recommendation Table

Be sure your probe has enough bandwidth to utilize the full performance your scope offers. Use the selection table below for recommended configurations.

Infiniium 54800-Series oscilloscope	Probe	System Bandwidth
54835A (1.0 GHz)	1156A (1.5 GHz)	1.0 GHz
54845A (1.5 GHz)	1157A (2.5 GHz)	1.5 GHz
54846A (2.25 GHz)	1158A (4.0 GHz)	2.25 GHz

Ordering Information

- With the purchase of a new 54800-series Infiniium oscilloscope:
 - Option #012 (54810A, 54815A 54820A, 54825A, 54835A) for 1156A
 - Option #013 (54845A) for 1157A
 - Option #014 (54846A) for 1158A
- For existing 54800-Series Infiniium oscilloscope customers order the 1156A**, 1157A**, or 1158A**

Each probe includes:

- Foam Case
- 12 Resistive signal pins (orange) (E2640A)
- 2 Solderable-tip 5 cm resistive signal leads (E2638A)
- 2 Socket-end 5 cm resistive signal leads (01156-82105)
- 2 Socket-end 10 cm resistive signal leads (01156-82108)
- 4 Micro clips (E2639A)*
- 12 Ground blade assemblies (E2641A)
- 12 Solderable SMT ground pins (1253-5054)
- 12 Solderable through-hole ground pins (1252-7150)
- 12 Offset ground pins (01156-27606)
- 2 Solderable-tip 5 cm ground leads (E2638A)
- 2 Socket-end 5 cm ground leads (01156-82103)
- 2 Socket-end 5 cm, 90° pin ground leads (01156-82104)
- 1 User and Service Guide
- One-year warranty

* The 1156A only comes with 2 micro clips.

To order additional quantities, see Accessories.

Accessories

E2637A	Precision Measurement kit (includes 2 solderable ground sockets with 8 green resistive signal pins)
E2638A	Solderable - tip 5 cm resistive signal leads (10) with ground leads (3)
E2639A	Micro clips, Qty. 4
E2640A	Resistive signal pins, (orange) Qty. 8
E2641A	Ground blade assembly, Qty. 8
E2654A	EZ-Probe® Positioner

** The Infiniium 54800-Series scope requires version A.04.30 or greater of the application software to work with the 1156A/7A/8A probes. An LS-120 drive is required for this upgrade.

To receive your free Infiniium software update, go to our Infiniium web site:

www.agilent.com/find/Infiniium1

Related literature

Infiniium 54800 Series Oscilloscope Probes and Accessories
Data Sheet 5968-7141EUS/EN

Infiniium 54800 Series Oscilloscopes
Product Overview 5980-2397EUS/EN

Optimizing Oscilloscope Measurement Accuracy on High-Performance Systems with Agilent Active Probes Application Note 1385 5988-5021EN

¹ Denotes warranted specifications, all others are typical

² For waveforms with edges >3 ns, the dynamic range is 12.0 Vpeak-to-peak

³ Installation category (over voltage category) I: Signal level, special equipment, or parts of equipment, telecommunication, electronic, etc., with smaller transient overvoltage than installation category (overvoltage category) II.

⁴ Probe calibrated to scope channel (under Probes Setup menu)

Agilent Technologies' Test and Measurement Support, Services, and Assistance

Agilent Technologies aims to maximize the value you receive, while minimizing your risk and problems. We strive to ensure that you get the test and measurement capabilities you paid for and obtain the support you need. Our extensive support resources and services can help you choose the right Agilent products for your applications and apply them successfully. Every instrument and system we sell has a global warranty. Support is available for at least five years beyond the production life of the product. Two concepts underlie Agilent's overall support policy: "Our Promise" and "Your Advantage."

Our Promise

Our Promise means your Agilent test and measurement equipment will meet its advertised performance and functionality. When you are choosing new equipment, we will help you with product information, including realistic performance specifications and practical recommendations from experienced test engineers. When you use Agilent equipment, we can verify that it works properly, help with product operation, and provide basic measurement assistance for the use of specified capabilities, at no extra cost upon request. Many self-help tools are available.

Your Advantage

Your Advantage means that Agilent offers a wide range of additional expert test and measurement services, which you can purchase according to your unique technical and business needs. Solve problems efficiently and gain a competitive edge by contracting with us for calibration, extra-cost upgrades, out-of-warranty repairs, and on-site education and training, as well as design, system integration, project management, and other professional engineering services. Experienced Agilent engineers and technicians worldwide can help you maximize your productivity, optimize the return on investment of your Agilent instruments and systems, and obtain dependable measurement accuracy for the life of those products.

By internet, phone, or fax, get assistance with all your test & measurement needs

By internet, phone, or fax, get assistance with all your test & measurement needs

Phone or Fax

United States:

(tel) 800 829 4444

Canada:

(tel) 877 894 4414

(fax) 905 282 6495

China:

(tel) 800 810 0189

(fax) 800 820 2816

Europe:

(tel) (31 20) 547 2323

(fax) (31 20) 547 2390

Japan:

(tel) (81) 426 56 7832

(fax) (81) 426 56 7840

Korea:

(tel) (82 2) 2004 5004

(fax) (82 2) 2004 5115

Latin America:

(tel) (305) 269 7500

(fax) (305) 269 7599

Taiwan:

(tel) 0800 047 866

(fax) 0800 286 331

Other Asia Pacific Countries:

(tel) (65) 6375 8100

(fax) (65) 6836 0252

Email: tm_asia@agilent.com

Online Assistance:

www.agilent.com/find/assist

Product specifications and descriptions in this document subject to change without notice.

© Agilent Technologies, Inc. 2004

Printed in USA, March 5, 2004

5988-3361EN



Agilent Email Updates

www.agilent.com/find/emailupdates

Get the latest information on the products and applications you select.



Agilent Direct

www.agilent.com/find/agilentdirect

Quickly choose and use your test equipment solutions with confidence.

Agilent T&M Software and Connectivity

Agilent's Test and Measurement software and connectivity products, solutions and developer network allows you to take time out of connecting your instruments to your computer with tools based on PC standards, so you can focus on your tasks, not on your connections. Visit **www.agilent.com/find/connectivity** for more information.



Agilent Technologies