

Test Equipment Solutions Datasheet

Test Equipment Solutions Ltd specialise in the second user sale, rental and distribution of quality test & measurement (T&M) equipment. We stock all major equipment types such as spectrum analyzers, signal generators, oscilloscopes, power meters, logic analysers etc from all the major suppliers such as Agilent, Tektronix, Anritsu and Rohde & Schwarz.

We are focused at the professional end of the marketplace, primarily working with customers for whom high performance, quality and service are key, whilst realising the cost savings that second user equipment offers. As such, we fully test & refurbish equipment in our in-house, traceable Lab. Items are supplied with manuals, accessories and typically a full no-quibble 2 year warranty. Our staff have extensive backgrounds in T&M, totalling over 150 years of combined experience, which enables us to deliver industry-leading service and support. We endeavour to be customer focused in every way right down to the detail, such as offering free delivery on sales, covering the cost of warranty returns BOTH ways (plus supplying a loan unit, if available) and supplying a free business tool with every order.

As well as the headline benefit of cost saving, second user offers shorter lead times, higher reliability and multivendor solutions. Rental, of course, is ideal for shorter term needs and offers fast delivery, flexibility, try-before-you-buy, zero capital expenditure, lower risk and off balance sheet accounting. Both second user and rental improve the key business measure of Return On Capital Employed.

We are based near Heathrow Airport in the UK from where we supply test equipment worldwide. Our facility incorporates Sales, Support, Admin, Logistics and our own in-house Lab.

All products supplied by Test Equipment Solutions include:

- No-quibble parts & labour warranty (we provide transport for UK mainland addresses).
- Free loan equipment during warranty repair, if available.
- Full electrical, mechanical and safety refurbishment in our in-house Lab.
- Certificate of Conformance (calibration available on request).
- Manuals and accessories required for normal operation.
- Free insured delivery to your UK mainland address (sales).
- Support from our team of seasoned Test & Measurement engineers.
- ISO9001 quality assurance.

Test equipment Solutions Ltd
Unit 8 Elder Way
Waterside Drive
Langley
Berkshire
SL3 6EP

T: +44 (0)1753 596000
F: +44 (0)1753 596001

Email: info@TestEquipmentHQ.com
Web: www.TestEquipmentHQ.com



R&S® ZNC Vector Network Analyzer

Solid performance
on a future-oriented
platform



R&S®ZNC Vector Network Analyzer

At a glance

High reliability, outstanding ease of operation, maximum precision and a wide dynamic range – this is what customers expect from a network analyzer. Using state-of-the-art technology and a user-friendly operating concept, Rohde & Schwarz has implemented all these features in its R&S®ZNC vector network analyzer.


Operating in a range from 9 kHz to 3 GHz, the network analyzer is targeted at applications in the mobile radio and electronic goods industries. The R&S®ZNC is the right choice when it comes to developing, producing and servicing RF components such as filters and cables.

The R&S®ZNC has a bidirectional test set for measuring all four S-parameters of active and passive DUTs. Plus, it offers calibration methods suitable for a wide range of T&M environments in development and production. The analyzer features excellent temperature and long-term stability, which ensures reliable measurements over several days without having to recalibrate the unit.

This short-depth, compact two-port analyzer leaves plenty of space on the workbench for the measurement application. It features low operating noise thanks to low power consumption and a sophisticated cooling concept. The low power consumption also reduces operating costs and protects the environment.

Key facts

- Frequency range from 9 kHz to 3 GHz
- Dynamic range of up to 130 dB
- Short sweep times of 11 ms for 401 points
- High temperature stability of typ. 0.01 dB/°C
- Wide power sweep range from -50 dBm to +13 dBm
- IF bandwidths from 1 Hz to 300 kHz
- Manual and automatic calibration
- Low trace noise of 0.004 dB RMS at 10 kHz IF bandwidth
- Large, high-resolution 12.1" screen
- Touchscreen user interface

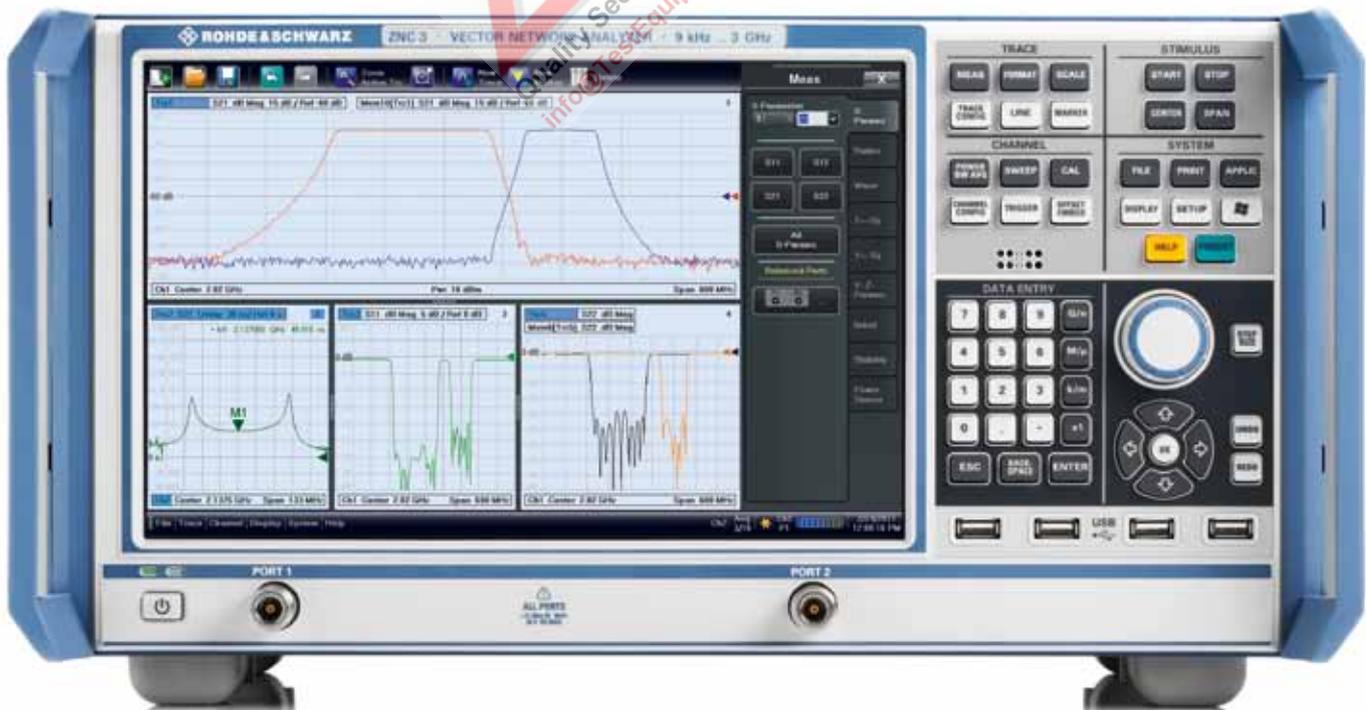

R&S®ZNC Vector Network Analyzer

Benefits and key features

Fast, precise and reliable – for high efficiency in development and production

- ▮ Short measurement times
- ▮ 20 sweeps/s with 100 dB dynamic range for straightforward filter adjustment
- ▮ Segmented sweep for high speed and accuracy
- ▮ Fast switching between instrument setups
- ▮ Extensive analysis functions for convenient trace analysis
- ▮ Time-domain analysis for distance-to-fault (DTF) measurements and filter adjustment

▷ [page 4](#)

Network analysis made easy

- ▮ Flat and clear menu structures for efficient operation
- ▮ Optimal display configuration for each measurement task

▷ [page 6](#)

Simple calibration – manual or automatic

- ▮ The right calibration method for every test application
- ▮ TSM (Through, Short, Match) – full calibration in only five steps
- ▮ Simple and error-free – automatic calibration in 30 seconds
- ▮ High temperature stability for long calibration intervals


▷ [page 8](#)

A worthwhile investment

- ▮ Ready for the future
- ▮ Upgrading test systems without rewriting system software
- ▮ An analyzer that speaks the user's language

▷ [page 10](#)

Block diagram of the R&S®ZNC

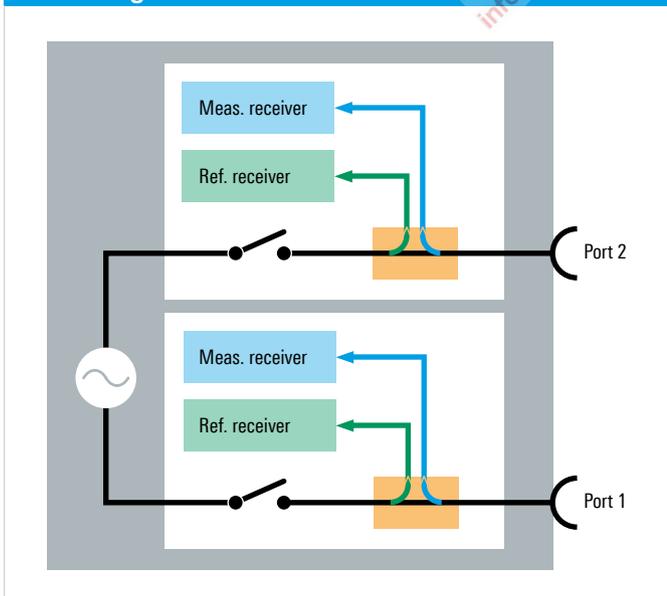

Fast, precise and reliable – for high efficiency in development and production

Short measurement times

The R&S®ZNC features short measurement times, a result of fast synthesizer settling times, high-speed data processing up to the display, and fast LAN or IEC/IEEE bus data transfer to the controller. The analyzer's maximum IF bandwidth of 300 kHz, together with its fast synthesizers, yields a sweep time as short as 11 ms for 401 points.

20 sweeps/s with 100 dB dynamic range for straightforward filter adjustment

The R&S®ZNC offers up to 130 dB dynamic range at 10 Hz IF bandwidth. At 10 kHz IF bandwidth, it provides typically 100 dB dynamic range, which enables the analyzer to perform more than 20 sweeps of 201 points per second. As a result, even high-blocking filters can easily be adjusted.

Segmented sweep for high speed and accuracy

When testing high-blocking DUTs such as repeater duplex filters, high IF bandwidths are required in the passband to provide short measurement times. In the stopband, on the other hand, such tests require high output powers and narrow IF bandwidths to provide the required dynamic range.



Filter measurement at 10 Hz IF bandwidth.

Name	On	Start	Stop	Points	Bandw
2 lower stopband	<input checked="" type="checkbox"/>	600 MHz	1.746 GHz	41	10 Hz
1 passband	<input checked="" type="checkbox"/>	1.746 GHz	1.855 GHz	101	300 kHz
3 upper stopband	<input checked="" type="checkbox"/>	1.855 GHz	3 GHz	41	10 Hz

Filter measurement using segmented sweep.

The R&S®ZNC's segmented sweep function divides the frequency axis into segments. Sweep parameters such as output power, IF bandwidth and number of points can be defined separately for each segment to optimally match the DUT characteristics. This increases measurement speed without any loss in accuracy.

Fast switching between instrument setups

To carry out complex measurements with different instrument setups, R&S®ZNC users do not need to load the setups from the hard disk each time. Once called, the setups for the required measurements, including calculated data such as calibration values, remain available in RAM. This reduces switching time, especially for measurements involving a large number of points. Switching between setups in remote operation is virtually instantaneous. Manually, all the user has to do is touch the screen to activate the setup needed for a desired DUT or measurement.


Extensive analysis functions for convenient trace analysis

The R&S®ZNC's wide range of analysis and display functions help the user evaluate important parameters at a glance.


Time-domain analysis for distance-to-fault (DTF) measurements and filter adjustment

The R&S®ZNC offers powerful time-domain analysis to measure components such as cables or filters.

The R&S®ZNC's gating function makes it easy to locate cable faults and analyze them in detail. Using prediction, the R&S®ZNC's frequency range can be virtually extended by a factor of up to 10. This yields resolution substantially higher than would be expected from the upper frequency limit of 3 GHz. For many applications, this eliminates the need for a higher-frequency – and more expensive – network analyzer.

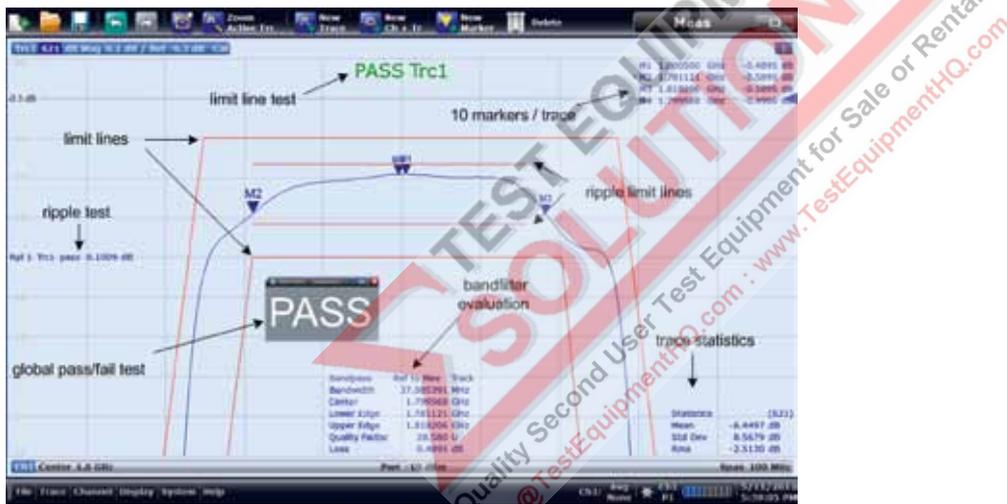

Wide range of analysis functions, e.g. for filter adjustment.

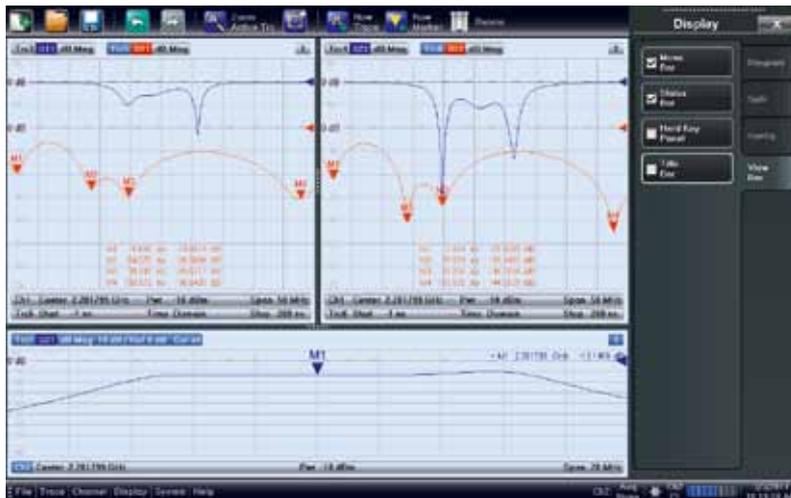

Filter adjustment using time-domain analysis.

Network analysis made easy


The R&S®ZNC vector network analyzer turns into reality what many users desire: configuration, measurement and analysis that are truly intuitive.

Flat and clear menu structures for efficient operation

The R&S®ZNC groups together logically related analyzer control functions at a single operational level, doing away with submenus and multilevel, nested menu structures.

- The R&S®ZNC features a soft panel that immediately shows all control elements that may be needed for a measurement and effectively helps users perform measurement tasks
- Via the soft panel, users can access all instrument functions in a maximum of three operating steps
- Pop-up menus allow many test parameters to be edited right where they are displayed
- Wizards guide the user through the steps of an operating sequence, for example when calibrating the network analyzer, thereby reducing operator errors to a minimum

Clearly structured user interface

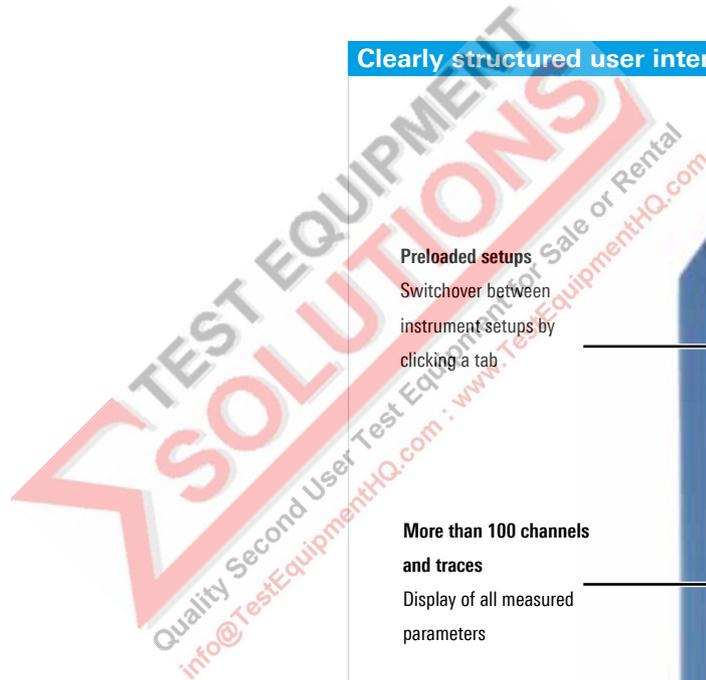


Large color touchscreen (12.1")
Clearly arranged display of many traces

Preloaded setups
Switchover between instrument setups by clicking a tab

More than 100 channels and traces
Display of all measured parameters

Pop-up menus
Fast access to desired function

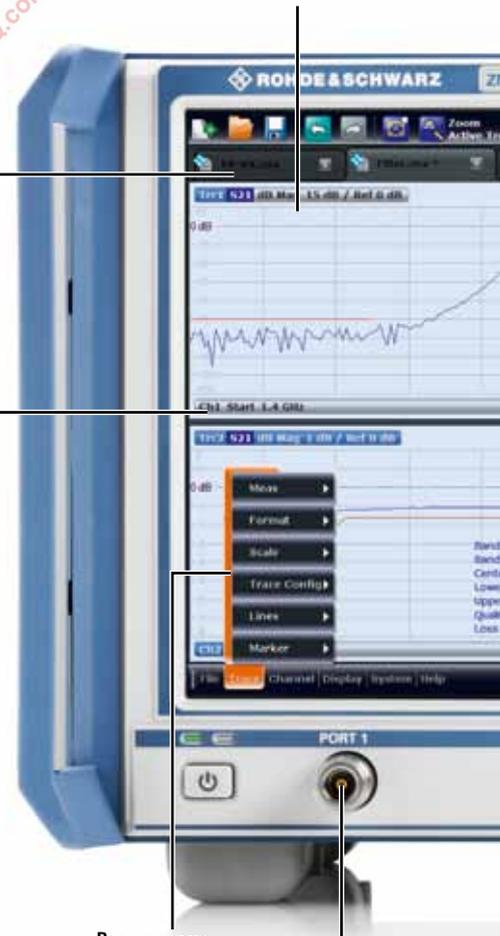

Optimal display configuration for each measurement task

The R&S®ZNC features a brilliant 12.1" WXGA color touchscreen. The user can set up the display as required by arranging diagrams, traces and channels in any desired combination. Traces can simply be dragged and dropped between diagrams, either with a finger or the mouse. The names of traces, channels and markers can be edited and replaced by user-specific names to make them easier to identify and to provide consistent result documentation.

With the R&S®ZNC, several instrument setups are available simultaneously. The user simply touches or clicks a tab to put the desired setup and diagrams in the foreground and start the associated measurements.

This convenient approach makes it possible to handle different measurement tasks simultaneously without overloading the display with diagrams that are not currently needed. The user can add further measurements for a given component without modifying the original measurement. This function allows the user to very quickly switch between setups, an essential prerequisite for high throughput in production.



Toolbar

Fast access to frequently used functions

Soft panel

Optionally on the right or left, for direct instrument control without submenus

Logically arranged hardkeys

Just a few keystrokes to desired configuration

Online help

Context-sensitive, including remote control commands

Undo/Redo

Cancels or restores the last one to six entries

Widely spaced test ports

Easy connection of DUT
Plenty of space for connecting test cables

Transparent dialog windows

Traces remain visible

USB connectors for auxiliary equipment

Connection of power sensor, automatic calibration unit, mouse/keyboard, memory stick, etc.

Simple calibration – manual or automatic

The right calibration method for every test application

The R&S®ZNC supports all common calibration methods for coaxial DUTs as well as calibration methods for measurements on DUTs in test fixtures or on printed boards. Graphical wizards guide the user step by step through the calibration.

- **TOSM** calibration (**T**hrough, **O**pen, **S**hort, **M**atch)
- **TRL/LRL** calibration (**T**hrough, **R**eflect, **L**ine/Line, **R**eflect, **L**ine) for printed-board-based test structures and on-wafer applications
- **TRM** calibration (**T**hrough, **R**eflect, **M**atch) for applications using test fixtures
- **UOSM** calibration (**U**nknown Through, **O**pen, **S**hort, **M**atch) for DUTs equipped with different types of input and output connectors and for calibration with an unknown through standard. Compared with the conventional adapter removal calibration method, this method reduces the number of calibration steps from 14 to 7. This saves time and reduces the risk of calibration errors

TSM (Through, Short, Match) – full calibration in only five steps

A network analyzer's accuracy after calibration essentially depends on the quality of the calibration standards used. The quality of the standards, in turn, depends mainly on how accurately the standards can be described by models. Describing the open standard using a model may be problematic; Rohde & Schwarz therefore created the new TSM calibration method for the R&S®ZNC. The new method requires only a through, a short and a match standard; an open standard is not needed. TSM provides accuracy equivalent to that of TOSM, and reduces the number of calibration steps from seven to five.



R&S®ZNC calibration wizard.



Manual calibration standards.



R&S®ZV-Z53 calibration unit (automatic).

Simple and error-free – automatic calibration in 30 seconds

Rohde & Schwarz offers automatic calibration units, which are immediately ready for operation and calibrate an R&S®ZNC in less than 30 seconds, covering 201 points. Users can connect adapters to the calibration unit to match different connector types used on the DUT. They can re-characterize the calibration unit, together with the adapters, and store the resulting data to the unit's internal memory.

High temperature stability for long calibration intervals

The R&S®ZNC's test set and receivers feature excellent temperature and long-term stability. The analyzer measures S-parameters with very low magnitude and phase drift of typically less than 0.01 dB/°C and 0.15°/°C. A calibrated R&S®ZNC allows precise measurements over several days without recalibration.

Typical effective system data of the R&S®ZNC		
	9 kHz to 100 kHz	100 kHz to 3 GHz
Directivity	46	45
Source match	41	40
Load match	44	45
Reflection tracking	0.02	0.02
Transmission tracking	0.028	0.018



R&S®ZV-Z270 calibration kit.



R&S®ZV-Z132 calibration kit.



R&S®ZV-Z121 calibration kit.

A worthwhile investment

Ready for the future

Industrial network analyzers have a useful life of ten years or more, depending on the application. Measurement tasks often change during this time, and there is an obvious need to increase measurement speed.

The R&S®ZNC has a modular design, i.e. subassemblies such as the GPIB interface, the power supply, the controller and the hard disk are inserted into slots on the rear. All test applications can be activated with a key code.

The R&S®ZNC can be quickly upgraded for new measurement tasks. Keeping the R&S®ZNC up to date, such as by adding a more powerful, next-generation controller or new functionality, involves only minimum downtime and service cost.

Upgrading test systems without rewriting system software

Network analyzers are the core of many test systems, for example in RF component production. Using latest generation Rohde&Schwarz network analyzers, system performance can be significantly enhanced.

The R&S®ZNC supports the remote control command sets of practically all other Rohde&Schwarz network analyzers as well as those of other manufacturers' instruments. Replacing an obsolete analyzer with an R&S®ZNC therefore poses no problems. In most cases it is sufficient to verify the R&S®ZNC's response during a measurement sequence; there is no need for costly modifications in the system software.

An analyzer that speaks the user's language

Many tasks are easiest solved in one's native language; the R&S®ZNC therefore comes with a multilingual user interface. Currently available languages include English, French, Russian, Chinese and Japanese.



English GUI.



French GUI.



Chinese GUI.

Ordering information

Designation	Type	Frequency range	Order No.
Base unit			
Vector Network Analyzer, Two Ports, 3 GHz, N	R&S®ZNC3	9 kHz to 3 GHz	1311.6004.12
Options			
Extended Power Range for R&S®ZNC3	R&S®ZNC3-B22	9 kHz to 3 GHz	1316.1752.02
GPIB Interface	R&S®ZNC-B10		1316.1617.02
Time Domain (TDR)	R&S®ZNC-K2		1316.1630.02
Accessories			
Calibration kits (manual calibration)			
Calibration Kit, N, 50 Ω	R&S®ZCAN	0 Hz to 3 GHz	0800.8515.52
Calibration Kit, N, 50 Ω	R&S®ZV-Z270	0 Hz to 18 GHz	5011.6536.02
Calibration Kit, 3.5 mm	R&S®ZV-Z235	0 Hz to 24 GHz	5011.6542.02
Calibration Kit, N (m), 50 Ω	R&S®ZV-Z121	0 Hz to 8 GHz	1164.0496.02
Calibration Kit, N (f), 50 Ω	R&S®ZV-Z121	0 Hz to 8 GHz	1164.0496.03
Calibration Kit, 3.5 mm (m), 50 Ω	R&S®ZV-Z132	0 Hz to 15 GHz	1164.1092.02
Calibration Kit, 3.5 mm (f), 50 Ω	R&S®ZV-Z132	0 Hz to 15 GHz	1164.1092.03
Calibration units (automatic calibration)			
Calibration Unit, Two Ports, N (f)	R&S®ZV-Z53	300 kHz to 18 GHz	1164.0473.72
Calibration Unit, Two Ports, 3.5 mm (f)	R&S®ZV-Z53	300 kHz to 24 GHz	1164.0473.32
Test cables			
N (m)/N (m), 50 Ω, 0.6 m/1 m length	R&S®ZV-Z91	0 Hz to 18 GHz	1301.7572.25/38
N (m)/N (m), 50 Ω, 0.6 m/0.9 m length	R&S®ZV-Z191	0 Hz to 18 GHz	1306.4507.24/36
N (m)/3.5 mm (m), 50 Ω, 0.6 m/1 m length	R&S®ZV-Z92	0 Hz to 18 GHz	1301.7589.25/38
N (m)/3.5 mm (m), 50 Ω, 0.6 m/0.9 m length	R&S®ZV-Z192	0 Hz to 18 GHz	1306.4513.24/36
Hardware add-ons			
USB Keyboard	PSL-Z2		1157.6870.04
USB Mouse	PSL-Z10		1157.7060.03
19" Rack Adapter	R&S®ZZA-KN5		1175.3040.00

Service options			
Two-Year Calibration Service	R&S®CO2ZNC		Please contact your local Rohde & Schwarz sales office.
Three-Year Calibration Service	R&S®CO3ZNC		
Five-Year Calibration Service	R&S®CO5ZNC		
One-Year Repair Service following the warranty period	R&S®RO2ZNC		
Two-Year Repair Service following the warranty period	R&S®RO3ZNC		
Four-Year Repair Service following the warranty period	R&S®RO5ZNC		

For data sheet, see PD 5214.5610.22 and www.rohde-schwarz.com

Your local Rohde & Schwarz expert will help you determine the optimum solution for your requirements. To find your nearest Rohde & Schwarz representative, visit www.sales.rohde-schwarz.com

Service you can rely on

- | Worldwide
- | Local and personalized
- | Customized and flexible
- | Uncompromising quality
- | Long-term dependability

About Rohde & Schwarz

Rohde & Schwarz is an independent group of companies specializing in electronics. It is a leading supplier of solutions in the fields of test and measurement, broadcasting, radiomonitoring and radiolocation, as well as secure communications. Established more than 75 years ago, Rohde & Schwarz has a global presence and a dedicated service network in over 70 countries. Company headquarters are in Munich, Germany.

Environmental commitment

- | Energy-efficient products
- | Continuous improvement in environmental sustainability
- | ISO 14001-certified environmental management system

Certified Quality System
ISO 9001



Rohde & Schwarz GmbH & Co. KG

www.rohde-schwarz.com

Regional contact

- | Europe, Africa, Middle East
+49 89 4129 123 45
customersupport@rohde-schwarz.com
- | North America
1 888 TEST RSA (1 888 837 87 72)
customer.support@rsa.rohde-schwarz.com
- | Latin America
+1 410 910 79 88
customersupport.la@rohde-schwarz.com
- | Asia/Pacific
+65 65 13 04 88
customersupport.asia@rohde-schwarz.com

R&S® is a registered trademark of Rohde & Schwarz GmbH & Co. KG
Trade names are trademarks of the owners | Printed in Germany (ch)
PD 5214.5610.12 | Version 01.00 | May 2011 | R&S®ZNC
Data without tolerance limits is not binding | Subject to change
© 2011 Rohde & Schwarz GmbH & Co. KG | 81671 München, Germany



5214561012